


## 2.4.7 OCG Logon

This function allows administrators to logon to the OCG Host for trading. 101 Keyboard and customized keyboard type are supported. The administrator enters Sender Comp ID and password. If all is correct, a successful trading host system logon message is displayed. The latest input password is shown for several seconds, and it will change to asterisk "\*" like the rest of the input password. Once the OCG Host has accepted the trading system logon, a successful OCG logon notification will be sent to all logon users.

Traders will then be able to begin trading activities. OCG password changing can also be performed in this function during the login process.

### Interface

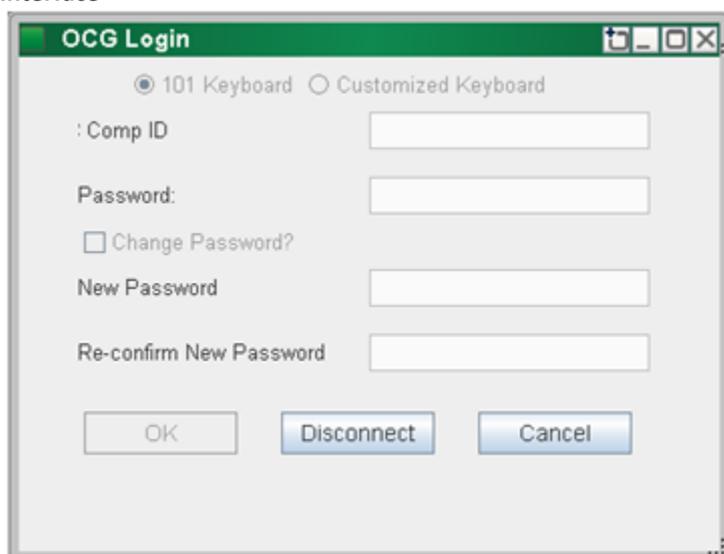

### Login OCG System

Step1: Select keyboard type > Step2: Enter Sender Comp ID > Step3: Enter Password > Step4: Press OK button and check the CG connection in server status bar is online

### Disconnect from OCG system

Step1: Press **Disconnect** button > Step2: Disconnection message displayed

### Change OCG Password (Before login to OCG)

Step1: Select keyboard type > Step2: Enter Sender Comp ID > Step3: Enter Password > Step4: Check the "Change Password?" box > Step5: Enter new password and re-confirm New Password > Step6: Press "OK" button

## Interface item:

Items	Type (Length)	Optional/ Mandatory	Remarks
Keyboard Selection	Radio Button	Mandatory	Allow user to select 2 different types of keyboard: - 101 keyboard - Customized Keyboard
Comp ID	Text Box(10)	Mandatory	Comp ID
Password	Password field (10)	Mandatory	Comp Password
Change Password check box	Check box	Optional	Allow user to change password if checked
New Password	Text Box(10)	Optional	For user enter the new password
Re-confirm New Password	Text Box(10)	Optional	For user re-enter the new password
OK	Button	---	Proceed OCG Login process and password changing process if "change password?" is checked - Button will be disabled after log in
Disconnect	Button	---	Disconnect with OCG - Button will only be enabled when connecting to server
Cancel	Button	---	Close dialog